Fixing Instructions For: 7225ASS L2L Kit


FI7225ASS
Issue 05-01/26


Fitting Top Lever & Lift to Lock Disc: Stick Pad **A** to Plate **B** and attach plate assembly central to top of lock follower to inside of door side as shown and firmly press in place. Repeat this for bottom follower to opposite outside door side. Install lock into door pocket prepared to lock fitting instructions template. *(Drill out follower hole deeper before hand to clear spindle end.)*


Fit Spindle XX9052: Use fitting Instructions supplied with this spindle.


Fit Lever assembly Inner Rose **G** over projecting spindle **XX9052** using screws **H,** secure using Grub Screw **J**, push fit Rose Cover. Fit **765** Inner Rose using self tapping screws **L**, and push fit Outer Rose.


Fitting Bottom Lever & E/Release Indicator: Locate Spindle **9055** from outside and push against follower. Cut Indicator assembly Inner Rose **M** spindle to size, locate into **9055** spindle, fix. using screws **L** and push fit Outer Rose **P.** Fit Lever assembly Inner Rose **G** over projecting **9055** spindle using screws **H**. Secure using Grub Screw **J**, push fit Rose Cover.

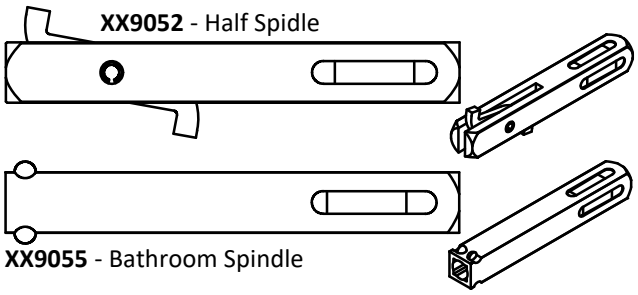

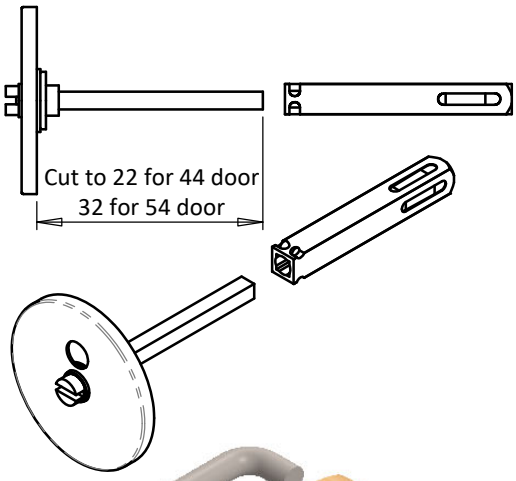

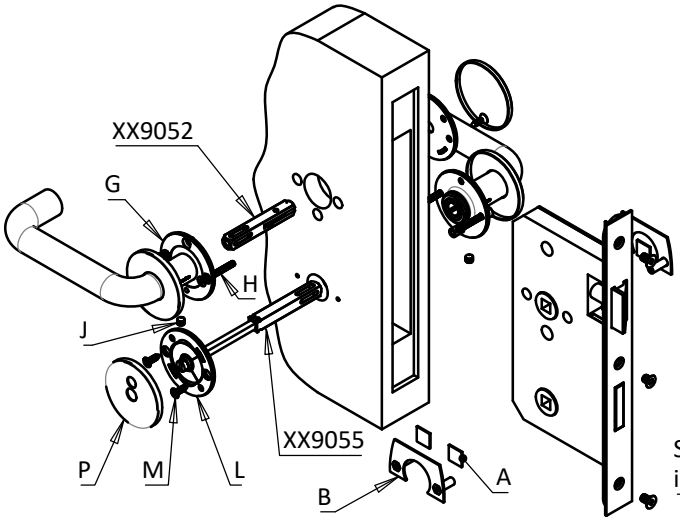

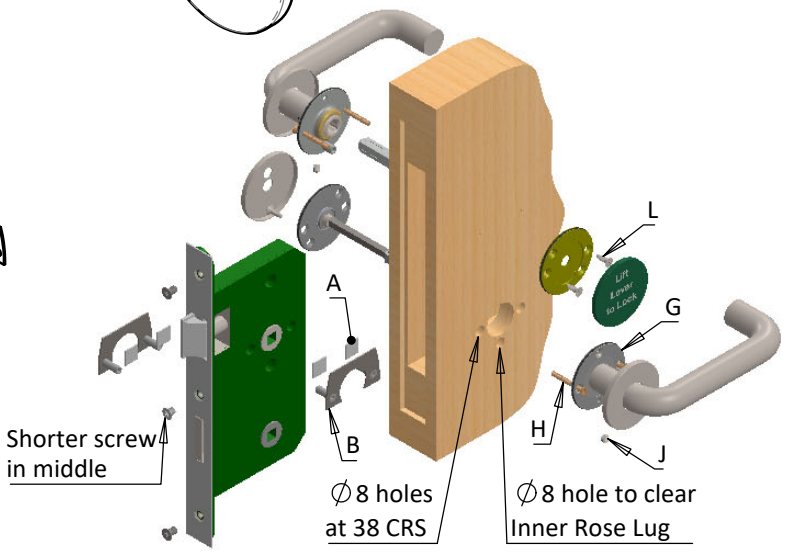

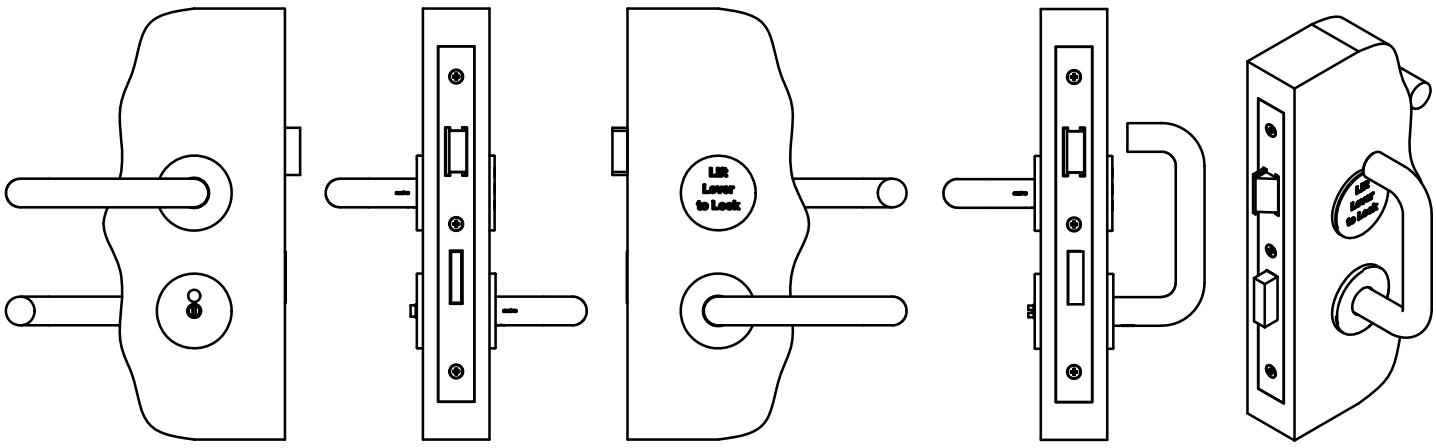

Outside of Door | **Inside of Door** | **Lever Upright locked position**

Recycle responsibly