


Fixing Template for: 7204.60, 7208.60, 7286.60, 7279.60, 7281.60, 7282.60L&R, 7225
(dot replaced with 'F' to above denotes radius forend)

FI7279.60
Issue 01-10/25


QR code access for information only
for template use printed instructions supplied

IMPORTANT NOTES:
To ensure the lock functions correctly and that the warranty conditions are met:
The lock must be supported at the back of the case, the spindle must be square to the face of the door and installed in accordance with our fixing instructions.
Bolts should be checked frequently for easy action, and if required, lubricated with light oil.
Some lock functions require certain holes to be cut one side only. Check before cutting.

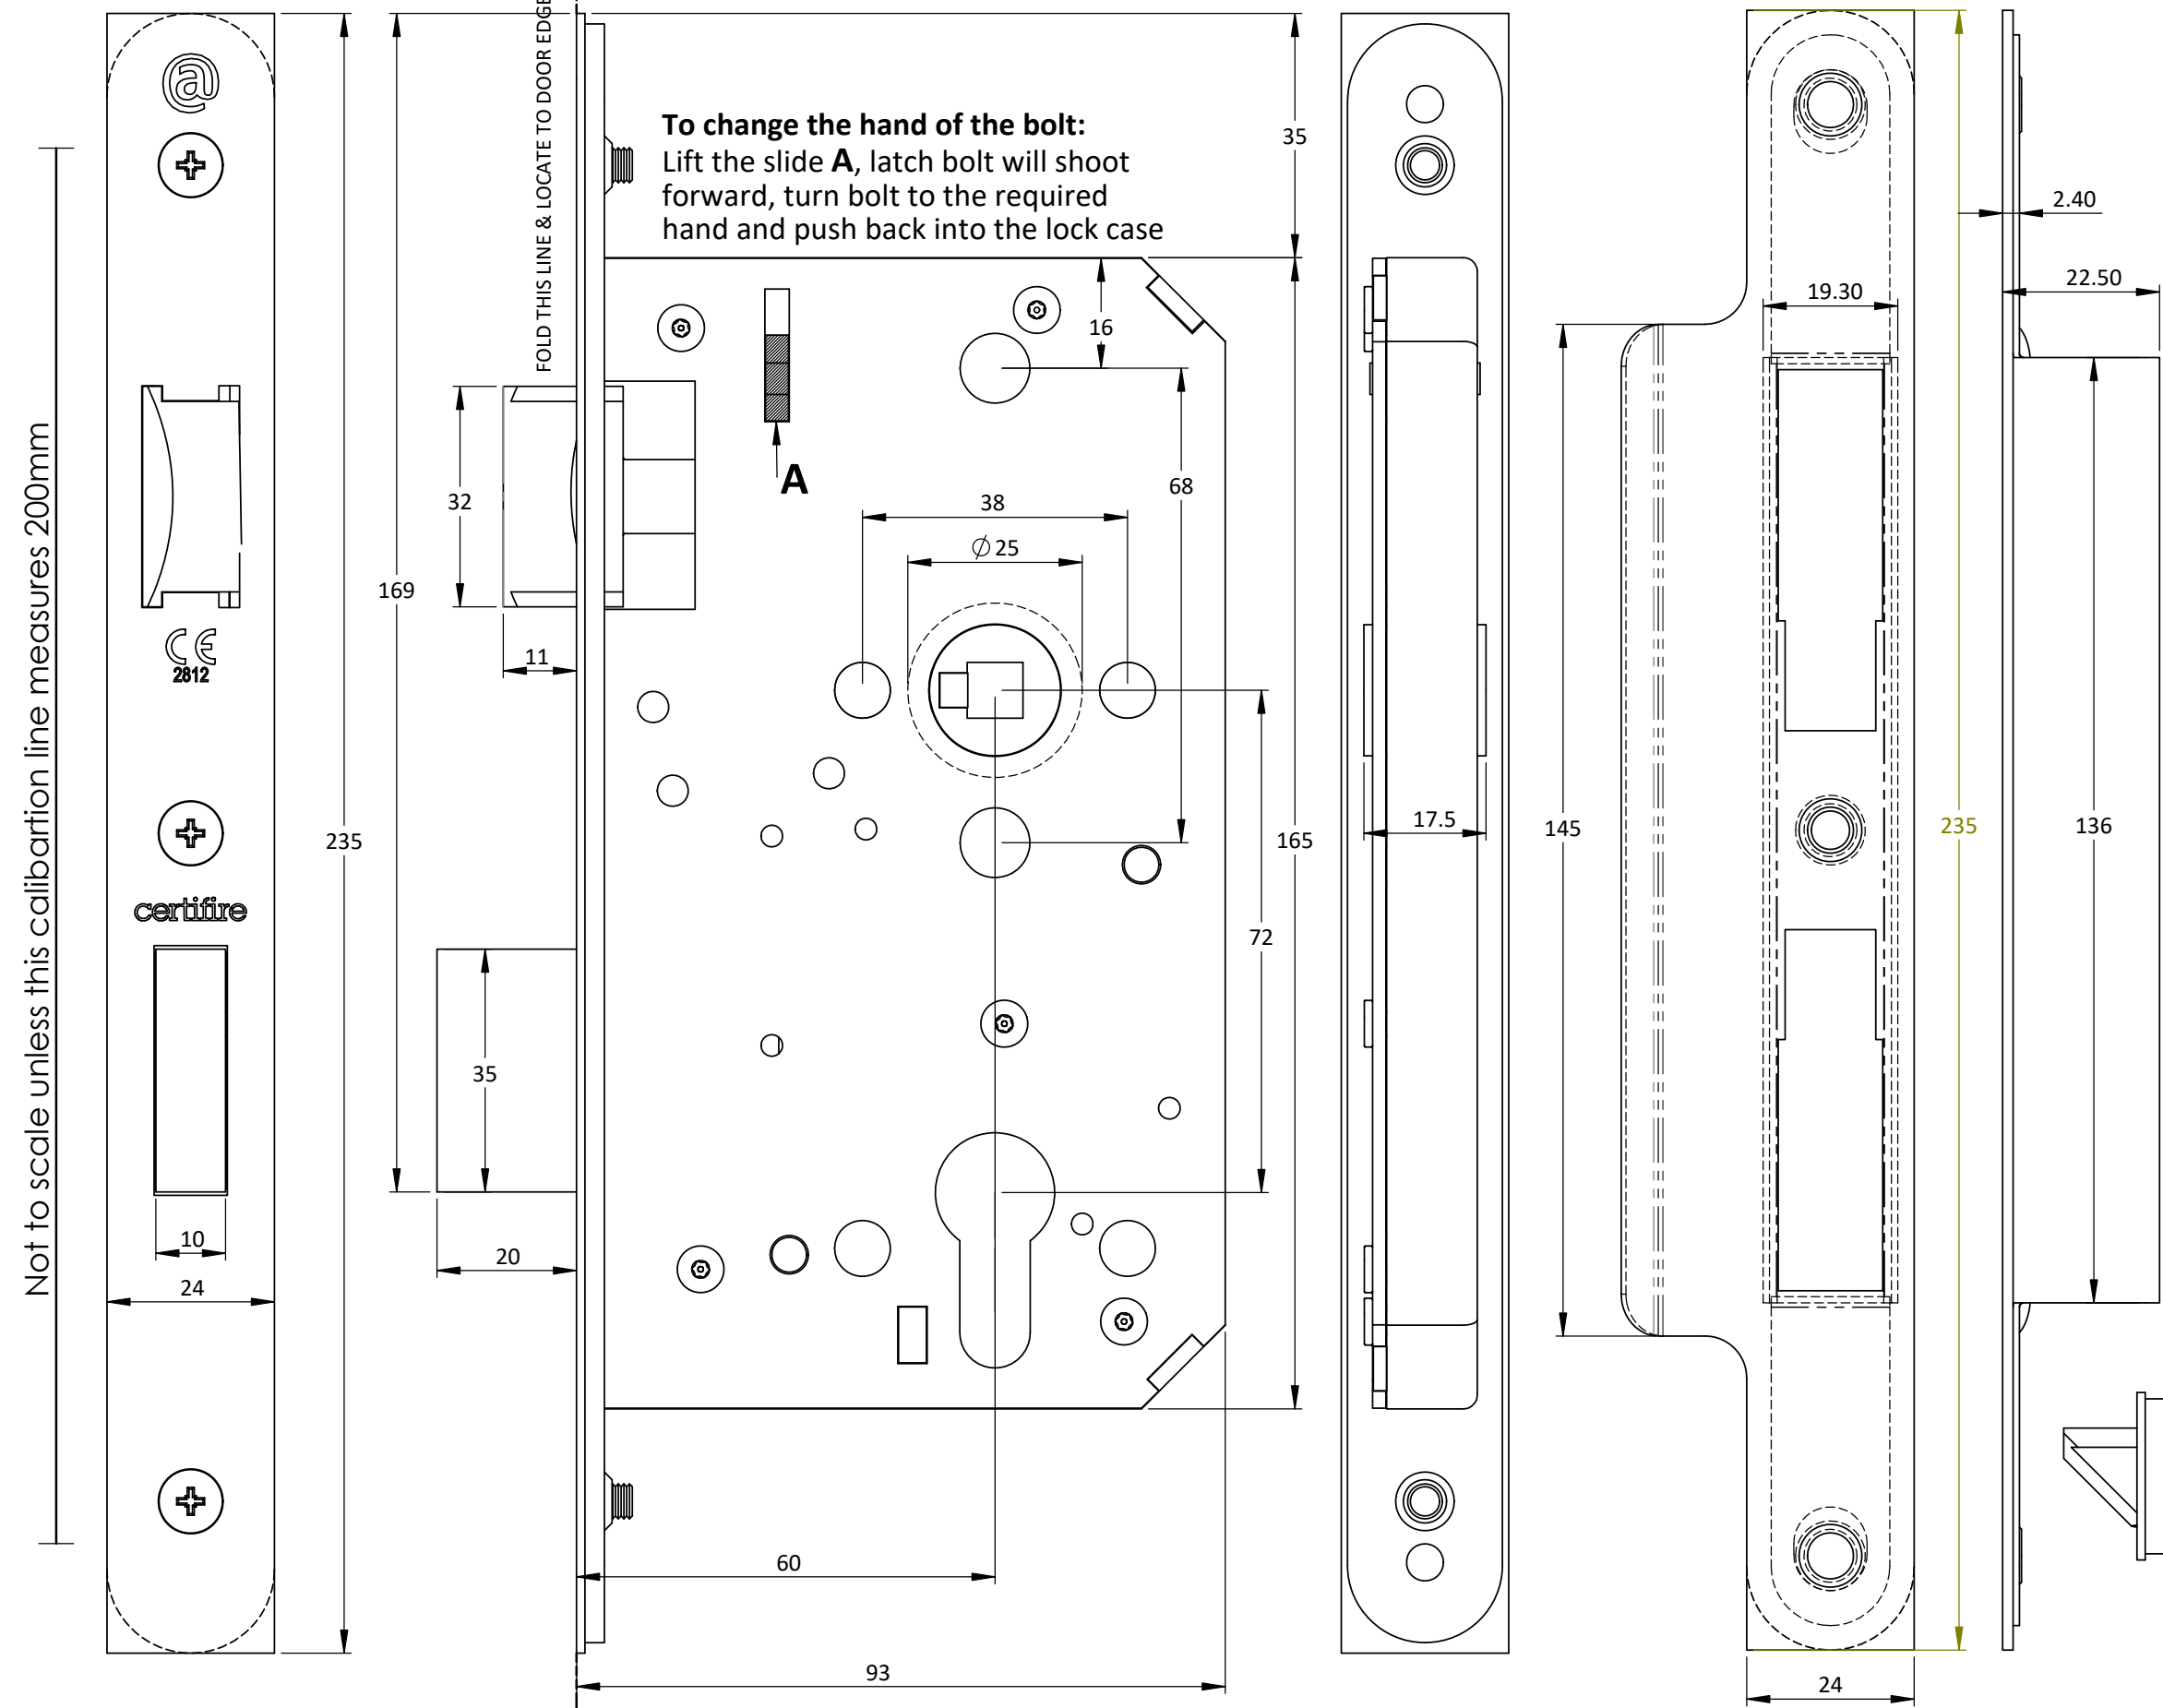

	Allgood Ltd., 63-83 Brearley Street, Birmingham, B19 3NT										
EN 12209:2003											
2812-CPR-AG0008	20										
7204.60, 7204F60	3	X	8	1	0	G	-	B	0	3	0
7279.60, 7279F60	3	X	8	1	0	G	2	B	A	3	0
2812-CPR-AG0010	20										
7286.60, 7286F60	3	X	8	1	0	G	2	B	A	0	0
2812-CPR-AG7923	25										
7208.60, 7208F60 7225.60, 7225F60	3	X	8	1	0	G	-	B	0	3	0
EN 179:2008											
2812-CPR-ABB0035	20										
7281.60, 7281F60 7282.60L, 7282.60R 7282F60L, 7282F60R	3	7	6	B	1	3	4	2	A	B/D	
Category of projection	Category 2										
Field of door application	Category B/D										
Door dimension suitability	1300mm wide x 2500mm high x 200Kg										
Intended for use on single inward and outward opening fire escape 54mm thick door											
Also read with Annex 'A' Ref. 'FIEN179' supplied with EN 179 approved locks											
Door distortion must not exceed maximum 5mm to enable safe exit at all times											
Minimum 1000N pulling force is achieved against fixing screws											
CE & Certifire CF347											

Fire Door installation: When installing this product to an EN 1634 compliant Fire Door, Intumescent Pack ref. XX7279FP6 or XX7286FP6 as required. must be used.

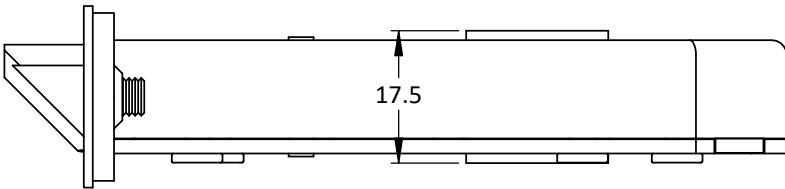

Recycle responsibly

Fixing Template for: 7204.60, 7208.60, 7286.60, 7279.60, 7281.60, 7282.60L&R, 7225
(dot replaced with 'F' to above denotes radius forend)

FI7279.60
Issue 01-10/25

