


Fixing Instructions For: 9052 Half Spindle - 44 to 54 door

FI9052
Issue 01-09/25

9052 - ITEMS SUPPLIED:

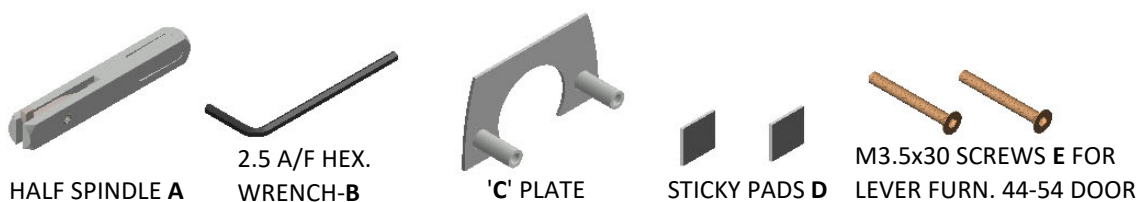

Peel off and attach Sticky Pads '**D**' to '**C**' Plate as shown

Locate '**C**' Plate assy. pummels through holes in lock and firmly press against surface, central to follower

door prepped as per Lever Furn. instructions

extra hole to allow Inner Rose pummel to sit flush


Screw '**E**'

Locate Half Spindle '**A**' into follower with Toggle in horizontal position


Wind Grub screw at end of spindle with Hexagon Wrench '**B**' supplied, until tight against lock follower



Toggle in horizontal position

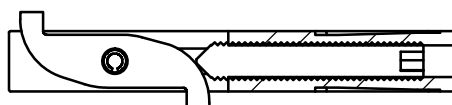

Toggle in locked position

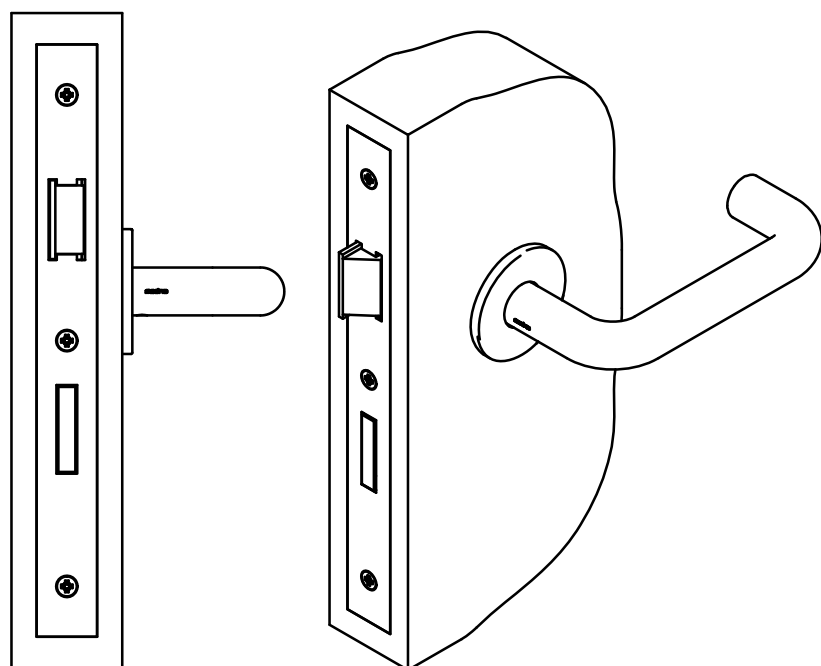

finally fit half a set of Lever assy. as per fitting instructions supplied with furniture, but using M3.5x30 screws **E** supplied



Recycle responsibly