

Fixing Instructions For: 9069 & 9070 Swivel Spindles

FI9069-70
Issue 01-09/25

ITEMS SUPPLIED: 9069 (44-64 door) 9070 (64-84 door)

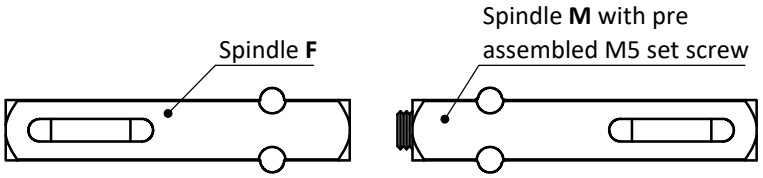

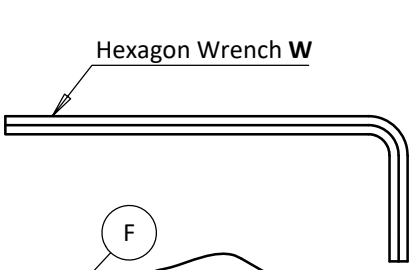



INSTRUCTIONS:

Pre-fit lock as per instructions supplied with lock.


1. Insert Spindle **F** into lock split follower on external secure side of door, push against follower face and hold.
2. Insert Spindle **M** into opposite side of split follower, push against follower face.
3. Insert Wrench **W** and wind pre-assembled set screw **G** until tight.
4. Fit Lever furniture as per instructions supplied.

(before tightening Lever Furn. BB screws, check to ensure Levers work independently, if necessary, adjust Spindle M screw G .

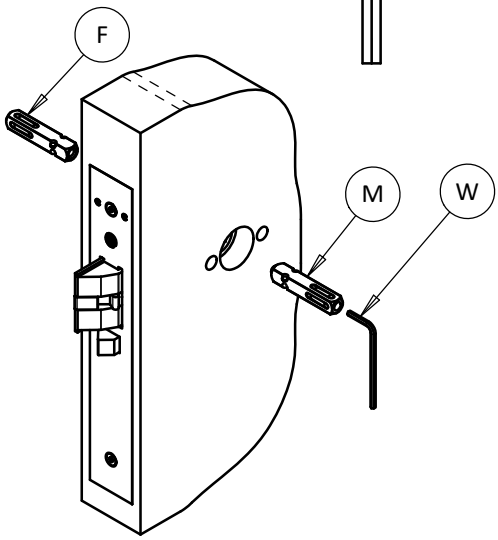


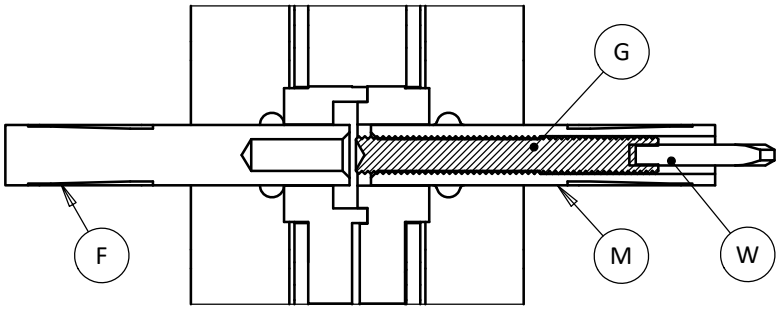


Spindles **F** and **M** inserted into split followers

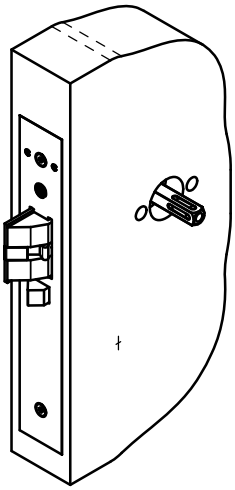

both spindles assembled into split followers

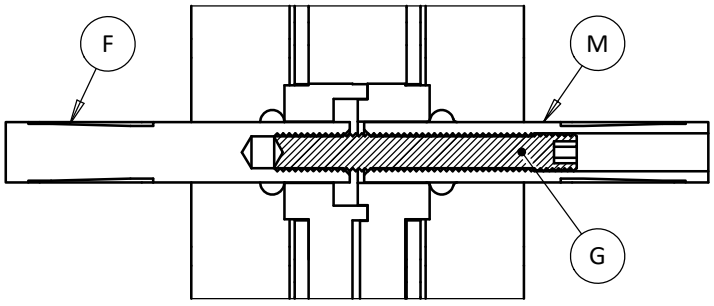

Screw **G** tightened into Spindle **F**

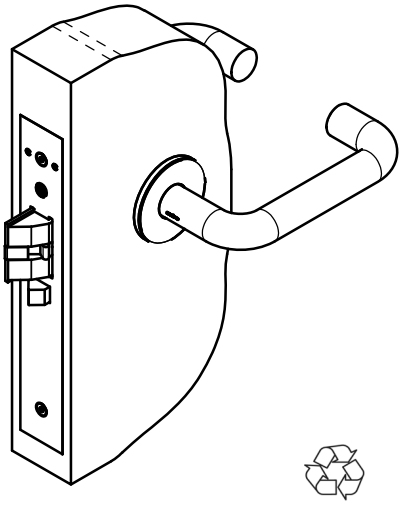

Recycle responsibly