

Fixing Instructions For: 6260 Flush Pull

FIXX6260
Issue 04-01/20

SCREW PACK:

2No. No. 10x25 Phillips CSK socket
self tapping s/steel screw




INSTRUCTIONS:

1. Cut out a pocket to suit rear box 142x65x21 deep at a required position to door
2. Position the Pull into pocket. and fix using screws provided

Fire door installation:

Please note when installing this product to an EN 1634 compliant fire door, it must be bedded on an intumescent seal provided separately to ensure integrity is maintained in a fire situation.

Allow extra 2mm for 98x50 intumescent seal.

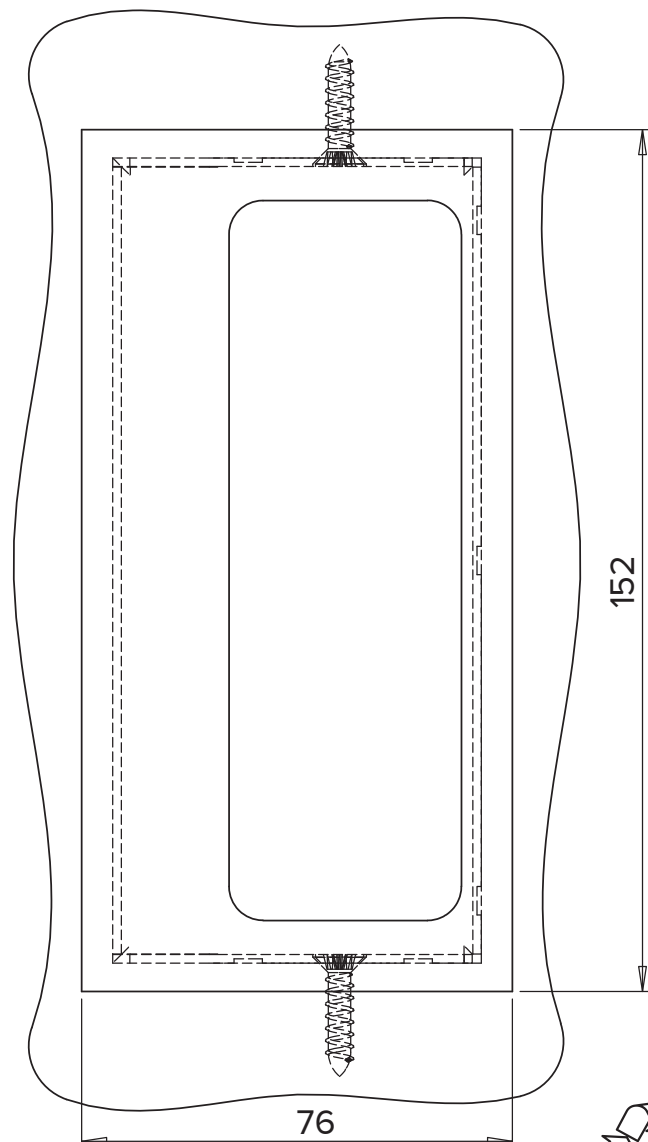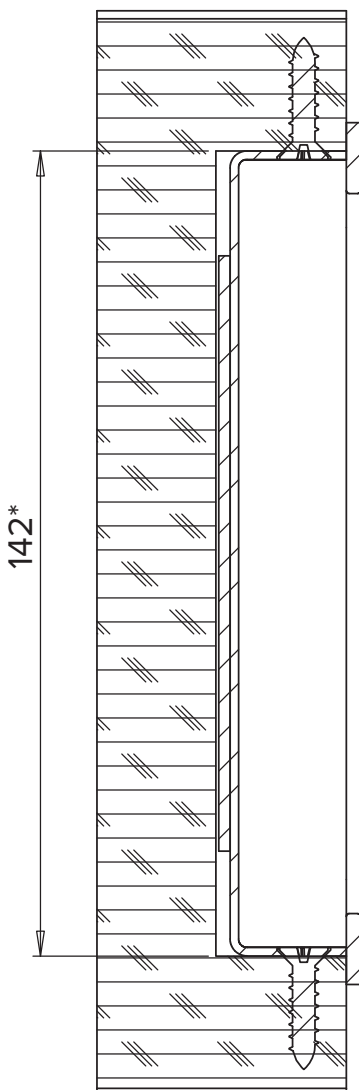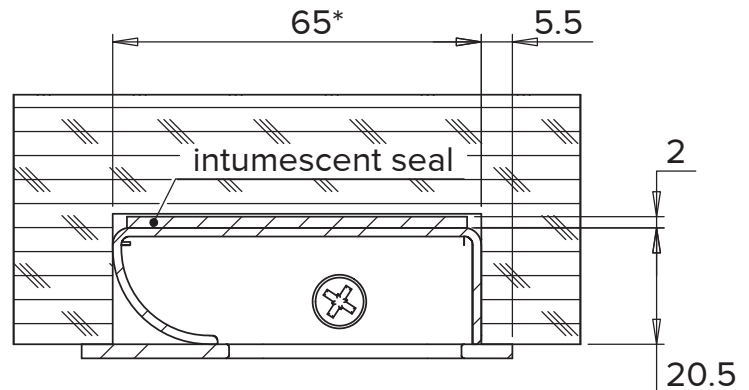

Recycle responsibly