




75576RG Allgood Secure Double Electromagnetic Lock

- ML600-D-M Slimline Double Electromagnetic Lock & Armature
- Maglock 500mm Length x 43mm Width x 25mm Depth
- 2 x Armature 180mm Length x 38mm Width x 13mm Depth
- Aluminium housing.
- Dual Voltage 12/24 VDC @480/240mA x 2
- 280kgs (600lb) holding force x 2
- Built in surge protection.
- Surface Mount
- Fail safe operation (Power to lock)
- +/- 15% voltage tolerance
- -10° to +50° operating temperature
- Push off release pin on armature
- Monitored (Lock monitoring)
- Voltage free relay contacts
- Door status monitoring
- Fire Tested to BS 1634-1 & BS 476-22 (up to 120 minute timber doors)
- Slim line double magnet.
- Clean and compact design in aluminium.
- Status LED indication
- No residual magnetism

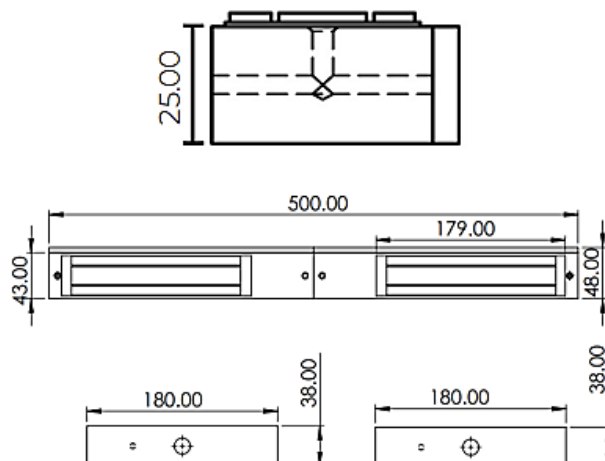

Voltage Selection

12v

24v

